



## Service Information

3LWTW4705FW

8537 974 65000

Last Modification: 13/09/18

Creation Date: 20/09/16

<b>Spare Part List</b>	<b>2</b>
<b>Exploded View</b>	<b>4</b>
<b>Technical Data</b>	<b>8</b>


This document is only intended for qualified technicians who are aware of the respective safety regulations.  
Subject to modifications

## Spare Part List

Pos	12NC	Description
999	4880 005 35876	Line Filter Assembly+Filter Board
A002	4820 000 98290	Part upper white
A003	4820 000 98291	Lid and bumper white
A004	4820 000 09001	9724509 BUMPER - LID.
A006	4812 012 29863	91770 HINGE-LID.
A008	4820 000 95924	Lock Strike Lid white
A010	4820 000 95925	Dispenser
A011	4820 000 95930	Drainhose Outer
A012	4820 000 95927	Cover hinge
A013	4820 000 95928	Clip
A014	4820 000 95929	Latch Lid Lock
A015	4820 000 95926	Drainhose
A016	4820 000 95931	Rear panel
A017	4820 000 95932	Cabinet white
A018	4820 000 95933	Cabinet Top Front
A019	4820 000 95934	Cabinet Top Rear
A021	4820 000 95938	Tie
A022	4820 000 98292	Foot assembly leveling
A023	4820 000 95936	Clamp hose
A024	4820 000 95940	Cover
A024	4820 000 95940	Cover
A026	4820 000 95941	Cabinet REAR TOP
A027	4820 000 95942	Cabinet FRONT
B001	4820 000 98315	Panel console
B002	4801 101 00173	Clip knob.
B003	4820 000 95946	Clip
B004	4880 005 25360	Control Unit Assembly Machine & Motor
B005	4820 000 98343	Panel rear console cover
B007	4820 000 95935	Screw
B009	4820 000 98345	Cord driving universal power
B011	4820 000 98255	Knob timer white assy
B012	4820 000 98251	Knob control white
B015	4820 000 95956	Water inlet
B016	4820 000 95938	Tie
B017	4820 000 95957	Cable harness
B018	4820 000 98344	Switch rotary encoder 3 pos
B019	4820 000 98256	Nut U
C001	4820 000 95960	Dispenser
C003	4820 000 95963	Washer
C004	4820 000 95970	Agitator
C005	4820 000 95971	Ring
C006	4812 012 29797	21366 NUT-LOCK
C007	4820 000 95972	Basket
C008	4812 012 29596	389140 BLOCK BASKET DRIVE.
C009	4820 000 98145	Cable tie
C010	4820 000 95974	Tub
C011	4820 000 95975	Seal
C012	4820 000 95969	Pump draining FILTER
C014	4820 000 98306	Damper assy
C016	4820 000 98351	Cable harness lower


Pos	12NC	Description
C017	4820 000 95961	Clamp cable
C019	4820 000 95965	Shield
C020	4820 000 95966	Retainer spring
C021	4820 000 95976	Base
D001	4820 000 95977	Pump
D003	4820 000 95979	Hose
D004	4820 000 95980	Clamp
D005	4820 000 95981	Gear CASE ASSY
D007	4820 000 95983	Motor
D009	4820 000 95986	Belt
D010	4820 000 95987	Actuator
D012	4820 000 95989	Capacitor
D013	4820 000 95991	Shield
D015	4820 000 98352	Shield pulley cover
D016	4820 000 95985	Clutch

## Exploded View

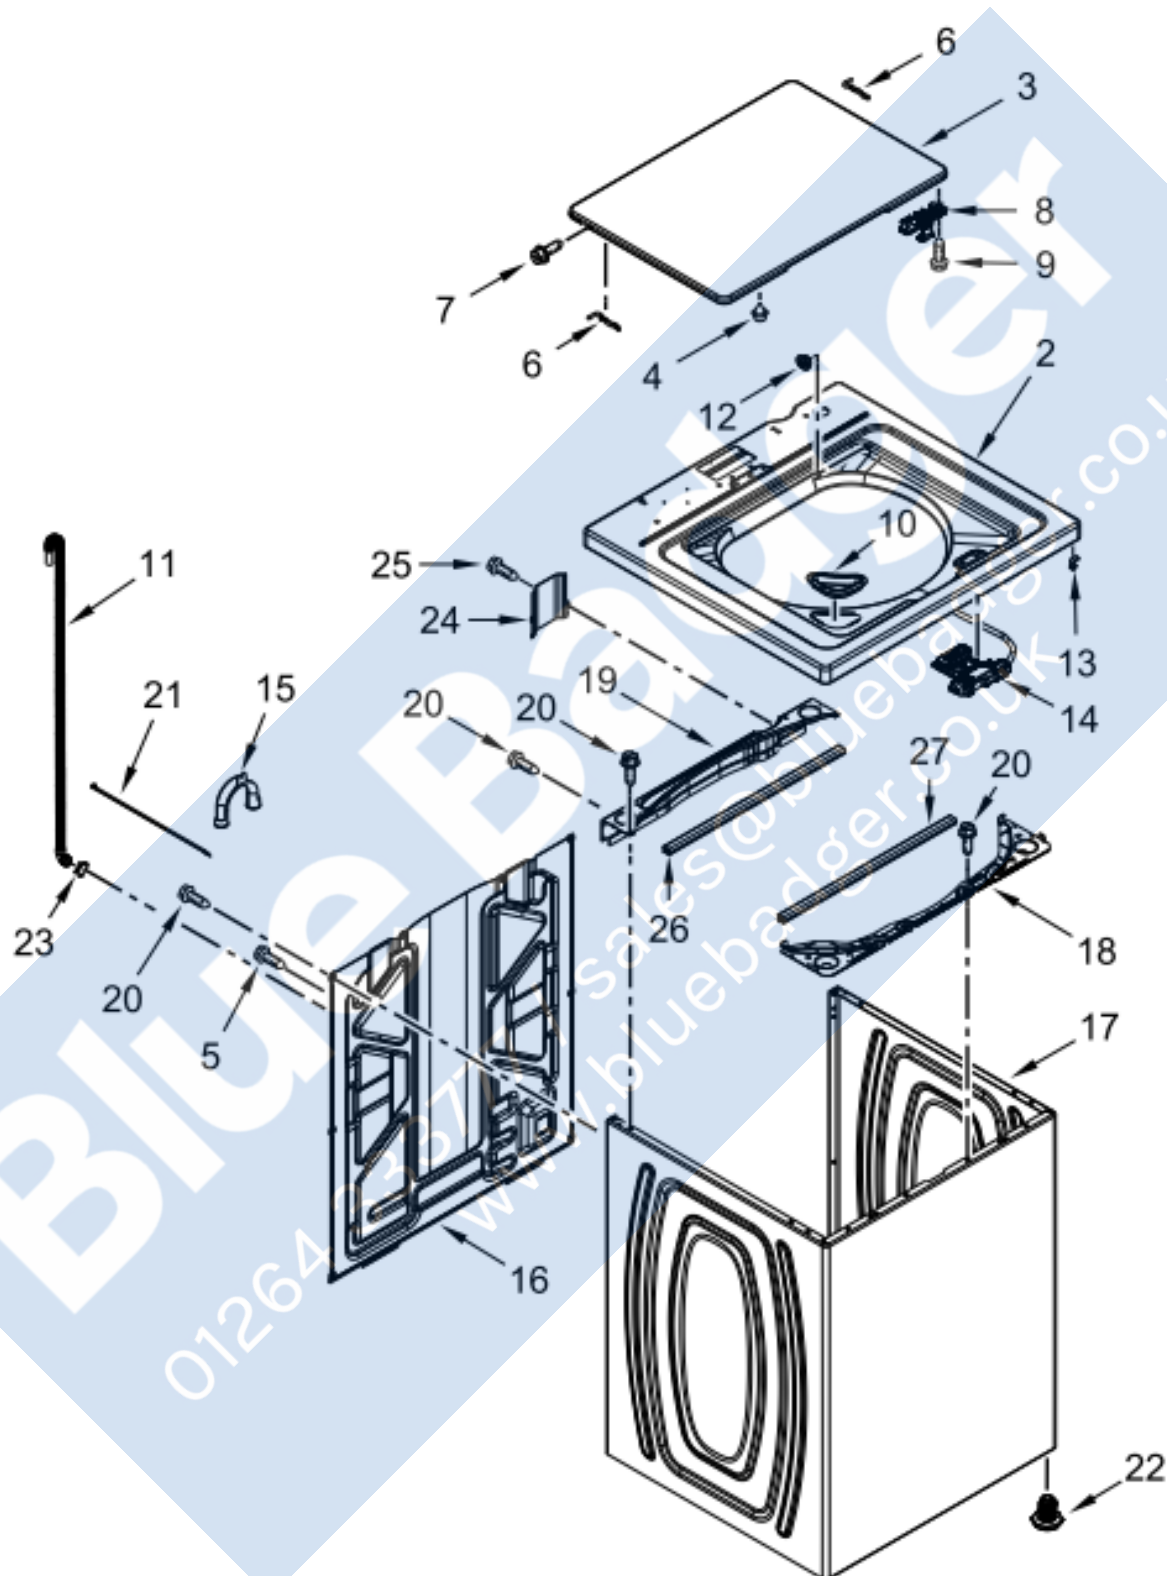


CLYWAS01a

## Exploded View

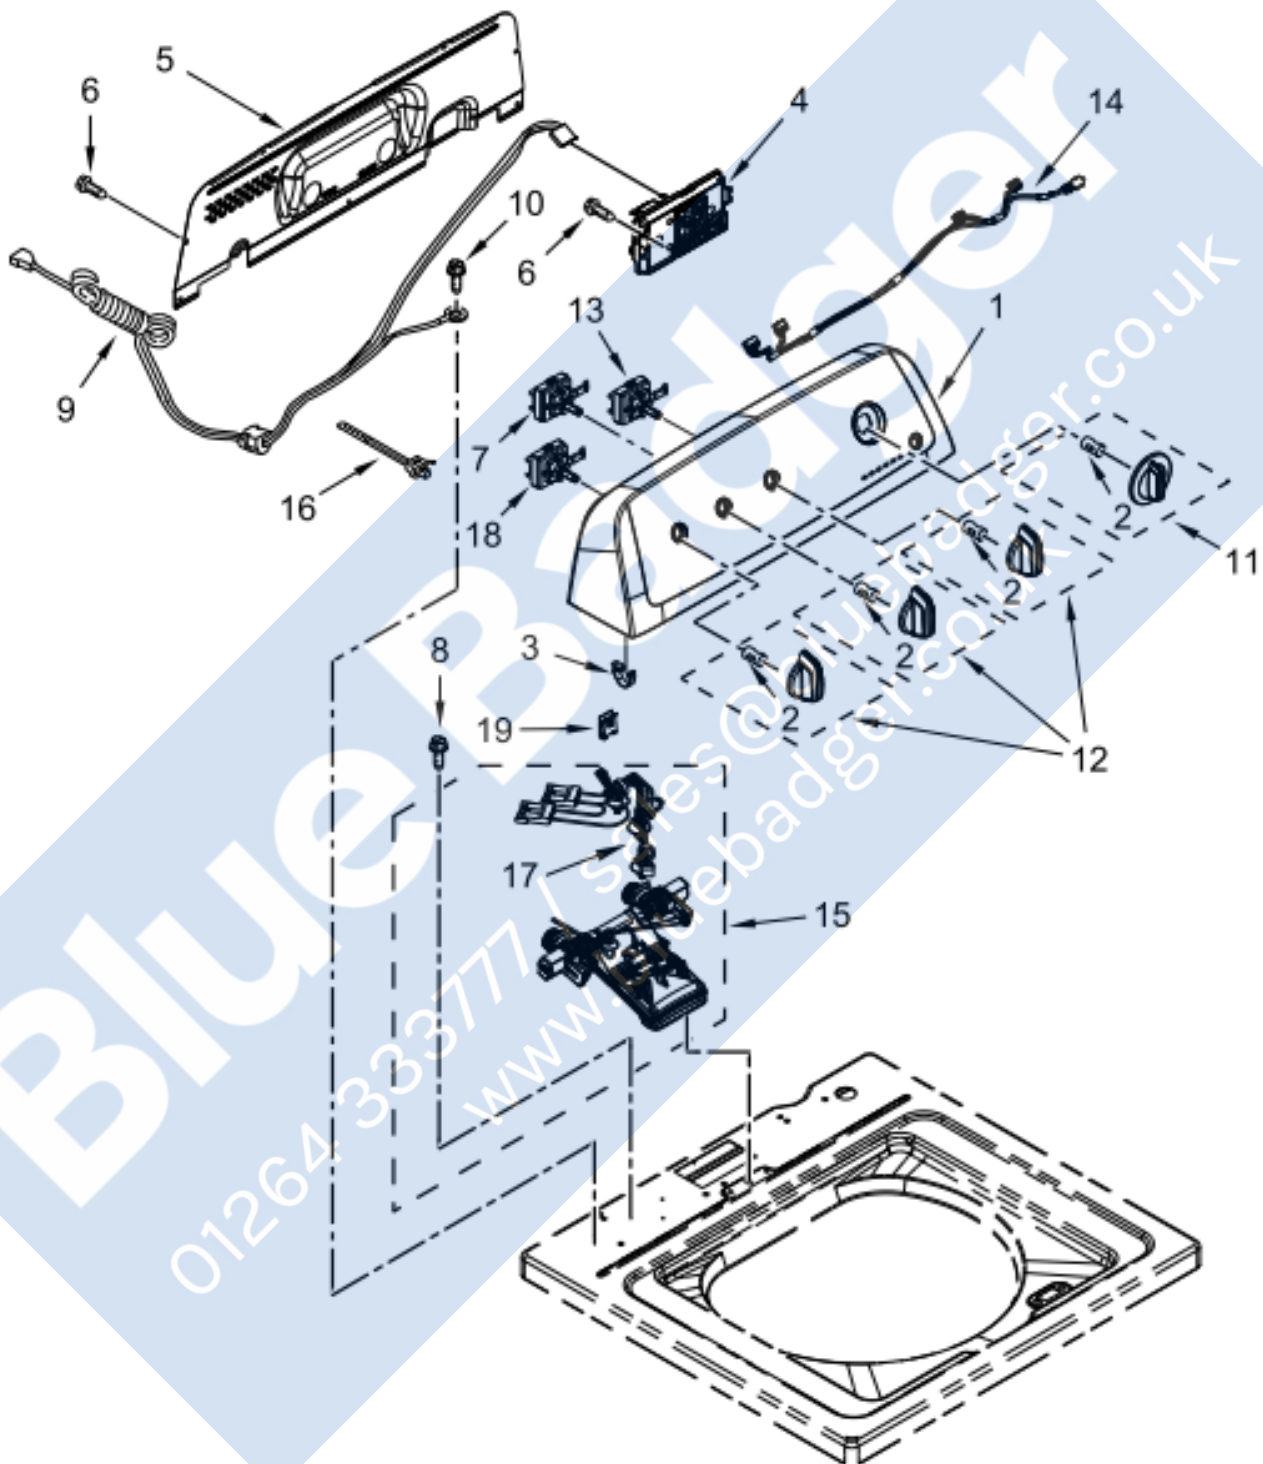

CLYWAS.01b


## Exploded View

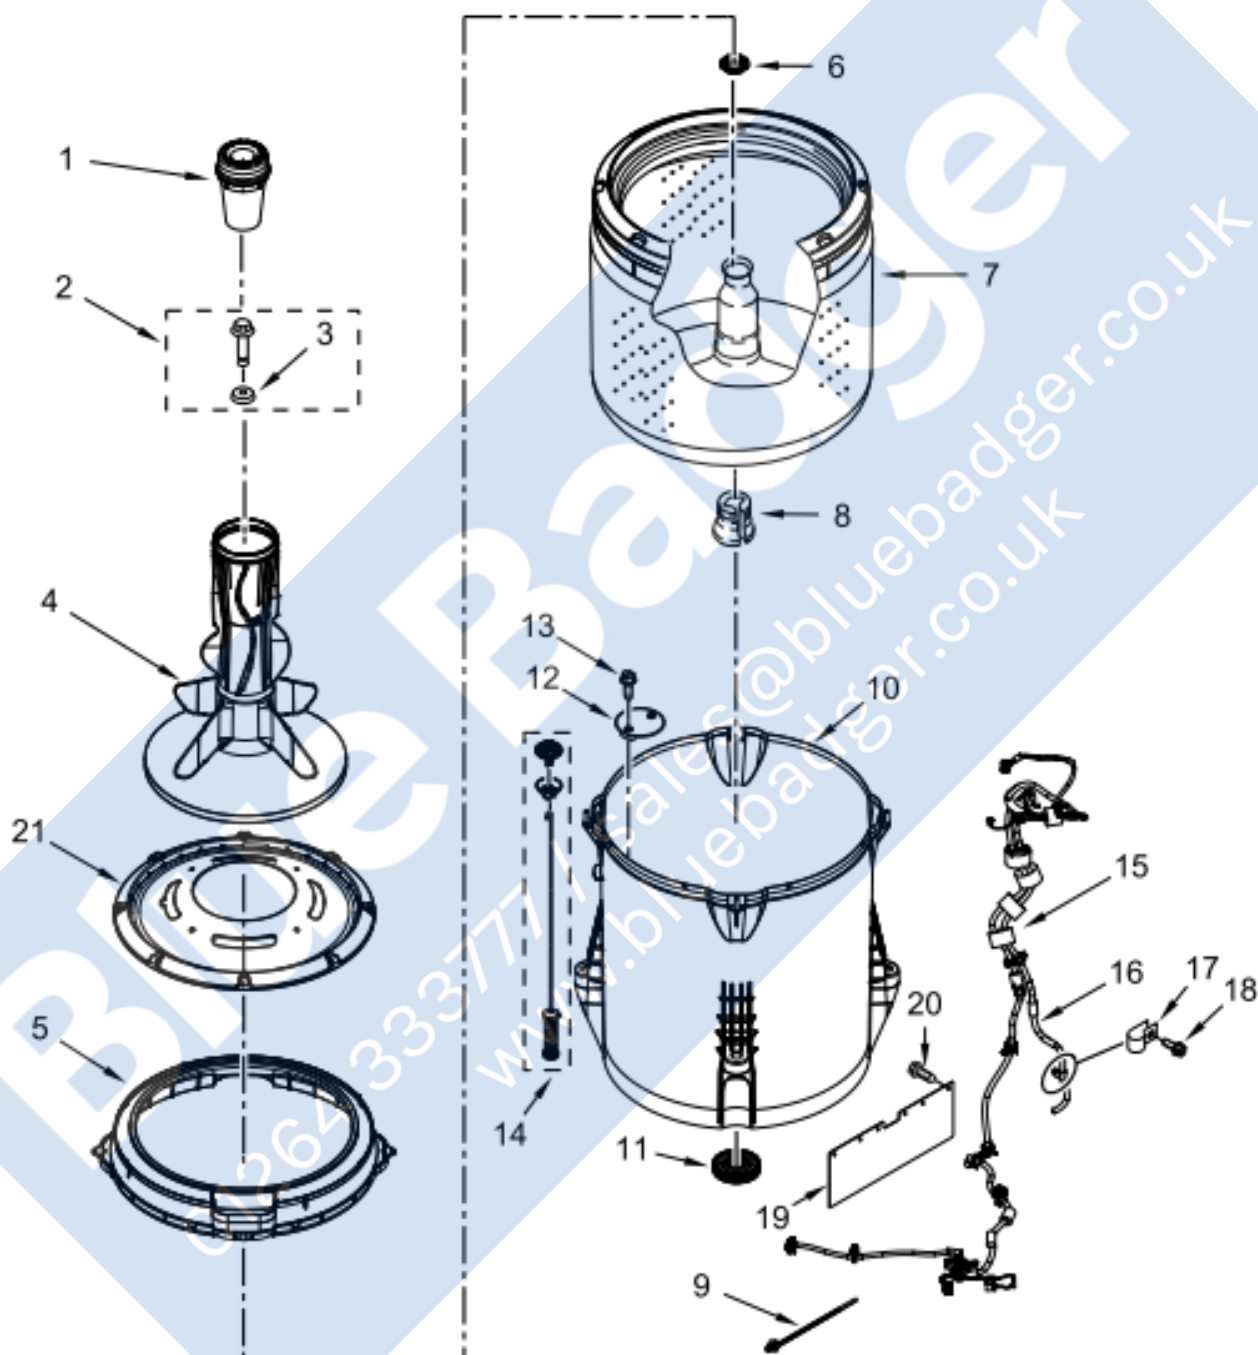

CLYWAS01c



## Exploded View

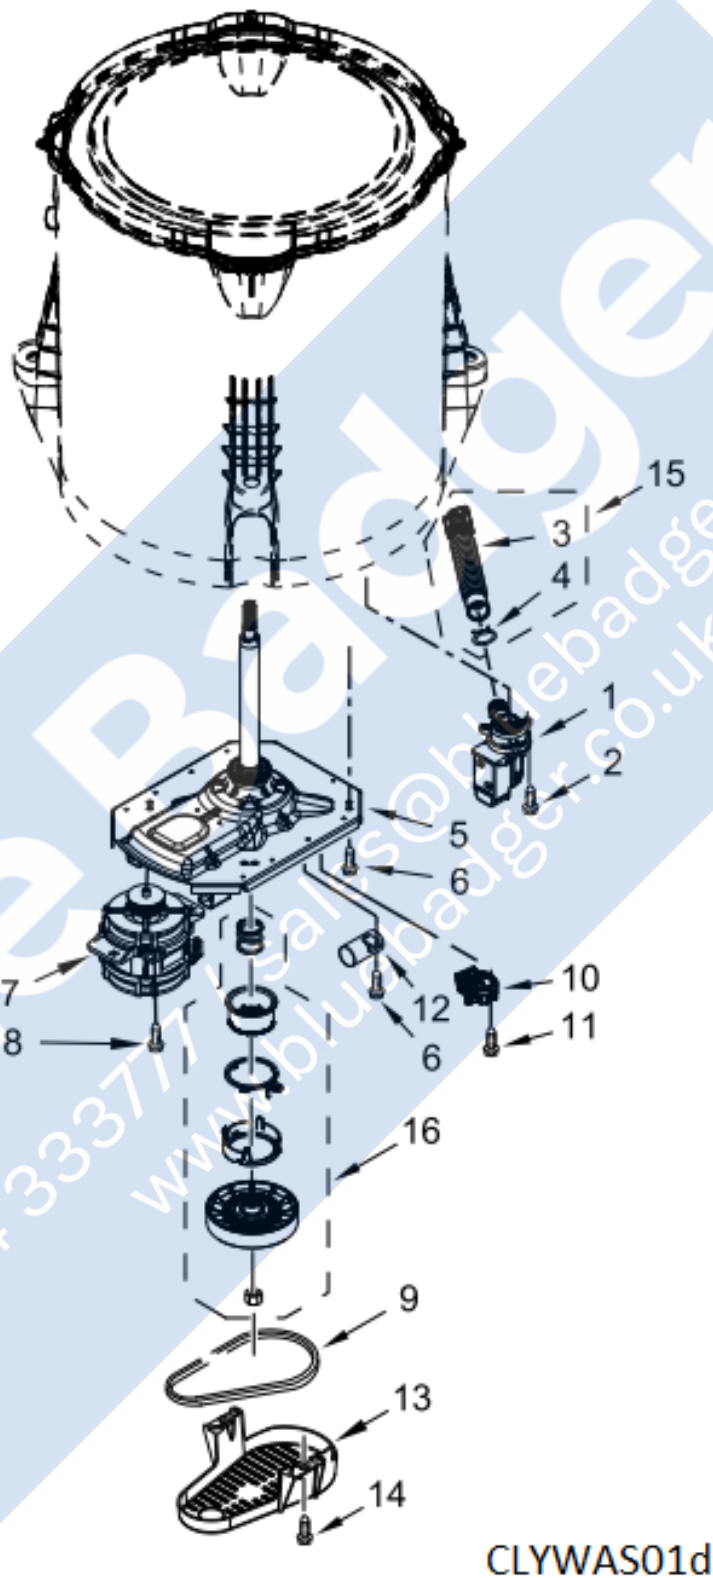

## Technical Data

### FOR SERVICE TECHNICIAN'S USE ONLY

**⚠ DANGER**



**Electrical Shock Hazard**

Only authorized technicians should perform diagnostic voltage measurements.

After performing voltage measurements, disconnect power before servicing.

Failure to follow these instructions can result in death or electrical shock.

**⚠ WARNING**



**Electrical Shock Hazard**

Disconnect power before servicing.

Replace all parts and panels before operating.

Failure to do so can result in death or electrical shock.

**Voltage Measurement Safety Information**

When performing live voltage measurements, you must do the following:

- Verify the controls are in the off position so that the appliance does not start when energized.
- Allow enough space to perform the voltage measurements without obstructions.
- Keep other people a safe distance away from the appliance to prevent potential injury.
- Always use the proper testing equipment.
- After voltage measurements, always disconnect power before servicing.

**IMPORTANT: Electrostatic Discharge (ESD) Sensitive Electronics**

ESD problems are present everywhere. Most people begin to feel an ESD discharge at approximately 3000V. It takes as little as 10V to destroy, damage, or weaken the main control assembly. The new main control assembly may appear to work well after repair is finished, but a malfunction may occur at a later date due to ESD stress.

- Use an anti-static wrist strap. Connect wrist strap to green ground connection point or unpainted metal in the appliance

-OR-

Touch your finger repeatedly to a green ground connection point or unpainted metal in the appliance.

- Before removing the part from its package, touch the anti-static bag to a green ground connection point or unpainted metal in the appliance.
- Avoid touching electronic parts or terminal contacts; handle electronic control assembly by edges only.
- When repackaging main control assembly in anti-static bag, observe above instructions.

**IMPORTANT SAFETY NOTICE — “For Technicians only”**

This service data sheet is intended for use by persons having electrical, electronic, and mechanical experience and knowledge at a level generally considered acceptable in the appliance repair trade. Any attempt to repair a major appliance may result in personal injury and property damage. The manufacturer or seller cannot be responsible, nor assume any liability for injury or damage of any kind arising from the use of this data sheet.

## Contents

Diagnostic Guide.....	2	Manual Tests.....	9
Activating Service Diagnostic Test Modes.....	2	Troubleshooting Guide.....	10, 11
Diagnostic Test Modes .....	3–5	Troubleshooting Tests.....	12–18
Customer Viewable Fault Codes.....	5	Main Control Connectors & Pinouts .....	12
Service Fault / Error Codes .....	6, 7	Component Locations & Washer Specs .....	19
Automatic Tests .....	8	Wiring Diagram .....	20



## FOR SERVICE TECHNICIAN'S USE ONLY

### DIAGNOSTIC GUIDE

Before servicing, check the following:


- Make sure there is power at the wall outlet.
- Has a household fuse blown or circuit breaker tripped? Was a regular fuse used? Inform customer that a time-delay fuse is required.
- Are both hot and cold water faucets open and water supply hoses unobstructed?
- Make sure drain hose is not sealed into drain pipe, and that there is an air gap for ventilation. Ensure drain height is between 39" (991 mm) and 8' (2.4 m) above the floor.
- All tests/checks should be made with a VOM (volt-ohm-milliammeter) or DVM (digital-voltmeter) having a sensitivity of 20,000  $\Omega$  per volt DC or greater.
- Resistance checks must be made with washer unplugged or power disconnected.
- **IMPORTANT:** Avoid using large diameter probes when checking harness connectors as the probes may damage the connectors upon insertion.
- Check all harnesses and connections before replacing components. Look for connectors not fully seated, broken or loose wires and terminals, or wires not pressed into connectors far enough to engage metal barbs.
- A potential cause of a control not functioning is corrosion or contamination on connections. Use an ohmmeter to check for continuity across suspected connections.

### DIAGNOSTIC LED – MAIN CONTROL

A troubleshooting tool has been implemented onto the main control board—a diagnostic LED.

**LED ON** – The Control is detecting correct incoming line voltage and the processor is functioning.

**LED OFF** – Control malfunction. Perform TEST #1: Main Control, page 12, to verify main control functionality.

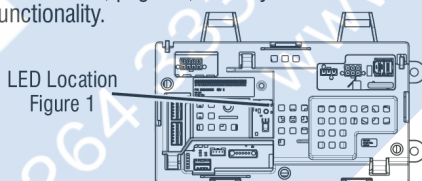

### SERVICE DIAGNOSTIC TEST MODES

These tests allow factory or service personnel to test and verify all inputs to the main control board. You may want to do a quick and overall checkup of the washer with these tests before going to specific troubleshooting tests.

### ACTIVATING THE SERVICE DIAGNOSTIC TEST MODES

1. Be sure the washer is in standby mode (plugged in with all indicators off).

**NOTE:** After initial power is applied, wait 10 seconds before activating Service Diagnostic Test Modes.

2. Perform the following sequence of movement using the cycle selector knob.

**NOTE: AFTER RESET**, sequence "a" through "e" must be completed within **6 seconds**.



**RESET** - Rotate cycle selector knob **counterclockwise** one or more clicks to clear sequence.



- a. Rotate cycle selector knob **clockwise** one click and wait ½ second.



- b. Rotate cycle selector knob **clockwise** one click and wait ½ second.



- c. Rotate cycle selector knob **clockwise** one click and wait ½ second.



- d. Rotate cycle selector knob **counterclockwise** one click and wait ½ second.



- e. Rotate cycle selector knob **clockwise** one click.

- Successful activation of Diagnostic Test Modes will be indicated by all status LEDs (except for Lid Locked) flashing ON and OFF in half-second intervals.

**NOTE:** LED names may vary between makes and models.

Legend: = ON = OFF

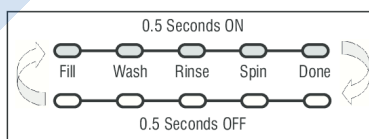


Figure 2 - Status LEDs flashing ON and OFF

- If the status LEDs do not display as described above, the sequence may not have been completed within 6 seconds. Repeat step 2 to ensure this was not the cause. If still unsuccessful, see Unsuccessful Entry, page 3.

## FOR SERVICE TECHNICIAN'S USE ONLY

3. There are several accessible Diagnostic Test Modes shown in the chart below. To select the desired Mode of Operation, turn the cycle selector knob until the status LEDs match the mode desired to enter.

DIAGNOSTIC TEST MODES				
MODE	STATUS LEDs			
	WASH	RINSE	SPIN	DONE
(Status LED names may vary between makes and models)				(Only on models with a display)
Fault Code Display Mode				01
Automatic Test Mode				02
Manual Test Mode				03
Calibration Mode				04
Sales Demo Mode				05
UI Test Mode				06
SW Version Display Mode				07
Factory Diagnostics Mode				08
Tachometer Verification				09
Dry Factory Diagnostics				10
Factory Cal Test Cycle				11
AATCC Cycle				14
NVH Cycle				15

4. Press the **START** button to enter desired mode of operation.

Refer to the following pages for detailed information on each mode of operation:

- **FAULT CODE DISPLAY MODE:** Page 3
- **AUTOMATIC TEST MODE:** Page 4
- **MANUAL TEST MODE:** Page 4
- **CALIBRATION MODE:** Page 4
- **SALES DEMO:** NOT FOR SERVICE USE\*
- **UI TEST MODE:** Page 4
- **SW VERSION DISPLAY MODE:** Page 5
- **FACTORY DIAGNOSTICS:** NOT FOR SERVICE USE\*. If accessed, washer must be recalibrated (see Calibration Mode)
- **TACHOMETER VERIFICATION MODE:** Page 5
- **DRY FACTORY DIAGNOSTICS:** NOT FOR SERVICE USE\*
- **FACTORY CAL TEST CYCLE:** NOT FOR SERVICE USE\*
- **AATCC CYCLE:** NOT FOR SERVICE USE\*
- **NVH CYCLE:** NOT FOR SERVICE USE\*

\* Press and hold the **START** key for 3 seconds to exit.

### Unsuccessful Entry

If entry into diagnostic test mode is unsuccessful, refer to the following indication and action:

**Indication:** None of the LEDs turn on.

**Action:** Press **START** button to enter setting mode.

- If indicators come on, repeat steps 1 through 4 of Activating the Service Diagnostic Modes. **NOTE:** Rotating the dial too fast or too slow will affect entry.
- If no indicators come on after pressing the **START** button, go to TEST #1, page 12.

### EXITING THE SERVICE DIAGNOSTIC TEST MODES

Press and hold the **START** button for 3 seconds at any time to exit diagnostic test modes.

Washer will exit diagnostic test modes after 5 minutes of inactivity or unplugging the power cord.

### FAULT CODE DISPLAY MODE (Pgs 6–7)

To access fault/error codes, perform steps 1 and 2 of Activating the Service Diagnostic Test Modes. Turn the cycle selector knob until the status LEDs correspond as follows:

#### ■ "Done" LED On



Press the **START** button to enter Fault Code Display Mode. The status LEDs flash on and off.

1. To view last 4 fault codes:

- Turn cycle selector knob clockwise to view fault codes in the order of most recent to oldest. (Refer to Fault/Error Code charts on pages 6 & 7.)
- NOTE:** A fault/error code will be removed from memory if it does not reoccur after 10 consecutive wash cycles.

2. To clear fault codes:

- Turn cycle selector knob until the status LEDs flash ON and OFF (see figure 2, page 2).
- Press and hold the **START** button for 3 seconds to clear all fault codes and exit Fault Code Display Mode.

### Fault/Error Code Display Method

Fault/error codes are displayed by alternating the state of the Status LEDs in one second intervals. All fault/error codes have an F# and an E#. The F# indicates the suspect System/Category and the E# indicates the suspect Component system.

If the Fill or Sensing LED is **ON**, the **Fault Number** is represented; if **OFF**, the **Error Number** is represented (see example below). The remaining LEDs (Wash, Rinse, Spin, and Done) represent the fault and error code in binary. (See Fault/Error Code Charts on pages 6 & 7 for more information.)    = ON.

Frame Number	STATUS LEDs					Fault / Error Code	Frame Timing (sec.)
	FILL SENSING	WASH	RINSE	SPIN	DONE		
1	F	8	4	2	1	F2	0.5
2							0.5
3	E	8	4	2	1	E3	0.5
4							1.0
Repeat...							

LED names may vary between makes and models.

## FOR SERVICE TECHNICIAN'S USE ONLY

### AUTOMATIC TEST MODE (Page 8)

To access Automatic Test Mode, perform steps 1 and 2 of Activating the Service Diagnostic Test Modes. Turn the cycle selector knob until the status LEDs correspond as follows:

■ "Spin" LED On



**NOTE:** Status LED names may vary between makes and models.

Press the **START** button to begin the automatic test. See page 8 for order of automatic test.

- Upon entering the automatic test mode, the washer will perform an automatic test with water cycles to check major washer functions.
- Pressing the **START** button will manually advance to the next step.
- Press and hold the **START** button for 3 seconds at any time to exit Automatic Test mode.

**IMPORTANT:** Lid must be closed with lid lock enabled to perform test.

### MANUAL TEST MODE (Page 9)

To access Manual Test Mode, perform steps 1 and 2 of Activating the Service Diagnostic Test Modes. Turn the cycle selector knob until the status LEDs correspond as follows:

■ "Spin & Done" LEDs On



Press the **START** button to enter Manual Test Mode. See page 9 for manual test mode.

- Upon entering the manual test mode, the washer will have all outputs OFF.
- The cycle selector knob is used to select the output to be tested.
- The **START** button will activate/deactivate the selected output.
- When the selected output is activated, the corresponding status LEDs flash ON & OFF.
- Press and hold the **START** button for 3 seconds at any time to exit Manual test mode.

**IMPORTANT:** As a safety feature, the lid must be closed with lid lock enabled to activate either Agitate or Spin Test.

**NOTE:** Multiple outputs may be activated simultaneously.

**NOTE:** Outputs left on will time-out after 5 minutes.

### CALIBRATION MODE

**NOTE:** Calibration only applies to models that do not have level selection.

**IMPORTANT:** Calibration must be performed when any of the following components have been replaced: Main Control, Basket, Drive Assembly, Suspension, Motor, and Capacitor. Not performing calibration will result in poor wash performance.

- Do **NOT** interrupt calibration, disturb washer, or remove power; otherwise, calibration must be repeated.
  - Lid must be down to perform test.
  - Basket must be empty to perform test (no water or clothes).
  - Calibration cycle runs for approximately 2–4 minutes\*. Cycle completes when lid unlocks and washer enters standby mode.
- \*If Calibration Mode is run on a washer with a porcelain basket, the time necessary to complete the calibration may be longer.

**NOTE:** Before beginning calibration, check the drive system to verify that the cam on the splutch is moving freely and not binding.

To access Calibration Mode, perform steps 1 and 2 of Activating the Service Diagnostic Test Modes. Turn the cycle selector knob until the status LEDs correspond as follows:

■ "Rinse" LED On




**NOTE:** Status LED names may vary between makes and models.

Press the **START** button to begin washer calibration. All status LEDs will turn on.

### UI TEST MODE

To access UI (User Interface) Test Mode, perform steps 1 and 2 of Activating the Service Diagnostic Test Modes. Turn the cycle selector knob until the status LEDs correspond as follows:

■ "Rinse & Spin" LEDs On



**NOTE:** Status LED names may vary between makes and models. Use LED # identifications. Press the **START** button to begin the UI test.

- Upon entering the UI test mode, all status LEDs will be turned ON.
- Pressing the **START** button will turn on and off all status LEDs, or toggle the state of each status LED independently. (Example: if 2 are on, and 3 are off, then 2 will be turned off and 3 turned on.)




## FOR SERVICE TECHNICIAN'S USE ONLY

- When rotating the cycle selector knob, each click "indent" toggles the "Done" (5) LED.
  - Turning the rotary switches will toggle the following status LEDs on and off.
    - Rotary Switch #1 - toggles (1) Fill LED
    - Rotary Switch #2 - toggles (2) Wash LED
    - Rotary Switch #3 - toggles (3) Rinse LED
    - Rotary Switch #4 - toggles (4) Spin LED
- NOTE:** The number and location of rotary switches varies between makes and models. Switches are read from left to right, the left-most switch being #1.
- Press and hold the **START** button for 3 seconds at any time to exit UI test mode.
  - Washer will exit UI test mode after 5 minutes of inactivity or unplugging the power cord.

### SOFTWARE VERSION DISPLAY MODE

To access Software Version Display Mode, perform steps 1 and 2 of Activating the Service Diagnostic Test Modes. Turn the cycle selector knob until the status LEDs correspond as follows:


- "Rinse, Spin, and Done" LEDs On
- 

**NOTE:** Status LED names may vary between makes and models.

Press the **START** button to begin software display mode.

- Upon entering the software version display mode, the Major, Minor, and Test version numbers for the software are displayed by alternating the state of the Status LEDs in one second intervals; the process repeats following a pause.


For example, if the s/w version is 02.01.07, the following sequence would be displayed:

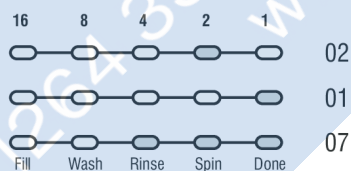

- Press and hold the **START** button for 3 seconds at any time to exit software version display mode.

### TACHOMETER VERIFICATION MODE

To access Tachometer Verification Mode, perform steps 1 and 2 of Activating the Service Diagnostic Modes. Turn the cycle selector knob until the status LEDs correspond as follows:

- "Wash and Done" LEDs On
- 

**NOTE:** Status LED names may vary between makes and models.

Press the **START** button to begin tachometer verification mode.

- Tachometer verification uses the status LEDs to represent the tachometer frequency (basket RPM).  
For example, **slowly** turn the basket by hand; as the basket turns, the DONE, SPIN, RINSE, and WASH status LEDs will illuminate one at a time in a visually repeating cycle. The LED timing is derived from the tachometer signal itself.
- Press and hold the **START** button for 3 seconds at any time to exit tachometer verification mode.

### CUSTOMER VIEWABLE FAULT CODES

There are 3 fault codes that may be visible to the customer indicated by the following Status LEDs:

- WASH LED ON (Long Fill Fault) – Refer to "No Fill, Long Fill" on page 7 for information.
- SPIN LED ON (Long Drain Fault) – Refer to "Long Drain" on page 7 for information.
- LID LOCK LED FLASHING CONTINUOUSLY (Lid Lock Fault) – Run TEST #3: Drive System on page 13. According to the result, refer to "Basket Speed Fault", "Shifter Fault", "Motor Fault", or "Motor Unable to Reach Target RPM" on page 7. Finally, refer to "Lid Lock Fault" on page 6.

**FOR SERVICE FAULT AND ERROR CODES, CONTINUE TO PAGES 6 AND 7**

## FOR SERVICE TECHNICIAN'S USE ONLY

**FAULT/ERROR CODES #1** — See page 3 to access Fault Code Display Mode. ☐ = ON

FAULT/ERROR CODE – DESCRIPTION	FAULT NUMBER					ERROR NUMBER				
	Status LEDs					Status LEDs				
Explanation & Recommended Procedure (Status LED names may vary between makes and models)	FILL* SENSING	WASH	RINSE	SPIN	DONE	FILL* SENSING	WASH	RINSE	SPIN	DONE
<b>F0E0 – NO FAULT</b>	On	8	4	2	1	Off	8	4	2	1
<b>F0E2 – OVER SUDS CONDITION DETECTED</b>	F					E			2	
Fault is displayed when Suds prevent the basket from spinning up to speed or the pressure sensor detects rising suds level. The main control will flush water in attempt to clear Suds. If the water flush is unable to correct the problem, this may indicate: <ul style="list-style-type: none"> <li>• Not using HE detergent.</li> <li>• Excessive detergent usage.</li> <li>• Check pressure hose connection from tub to pressure sensor. Is hose pinched, kinked, plugged, or leaking air?</li> <li>• Mechanical friction on drive mechanism or basket. (Clothing between basket and tub.)</li> </ul>										
<b>F0E4 – HIGH WATER TEMPERATURE – RINSE CYCLE</b>	F					E		4		
Fault is displayed when washer detects water temperature 105° or higher during rinse cycle. <ul style="list-style-type: none"> <li>• Hot water getting in. Make sure inlet hoses are connected correctly.</li> <li>• If hoses are installed properly, temperature thermistor may be stuck in low resistance range.</li> <li>• See TEST #5: Temperature Thermistor, page 16.</li> </ul>										
<b>F0E5 – OFF BALANCE LOAD DETECTED</b>	F					E		4		1
Fault is displayed when an off balance condition is detected. <ul style="list-style-type: none"> <li>• Check for weak suspension. Basket should not bounce up and down more than once when pushed.</li> <li>• Clothing should be distributed evenly when loading.</li> </ul>										
<b>F1E1 – MAIN CONTROL FAULT</b>	F				1	E				1
Indicates a main control fault. <ul style="list-style-type: none"> <li>• See TEST #1: Main Control, page 12.</li> </ul>										
<b>F1E2 – MOTOR CONTROL FAULT</b>	F				1	E		2		
Indicates a fault of the motor control section of the main control. <ul style="list-style-type: none"> <li>• See TEST #3b: Drive System – Motor, page 14.</li> </ul>										
<b>F2E1 – STUCK KEY</b>	F			2		E				1
One or more keys on the User Interface were actuated for 15 consecutive seconds. <ul style="list-style-type: none"> <li>• Fault occurs during Diagnostic Test Mode if a stuck key is detected.</li> <li>• See TEST #4: Console and Indicators, page 16.</li> </ul>										
<b>F2E3 – SWITCH MISMATCH</b>	F			2		E			2	1
The switches do not match the console or are not operating correctly. <ul style="list-style-type: none"> <li>• Fault occurs during Diagnostic Test Mode if a switch mismatch is detected.</li> <li>• See TEST #4: Console and Indicators, page 16.</li> </ul>										
<b>F3E1 – PRESSURE SYSTEM FAULT</b>	F			2	1	E				1
Fault is displayed when the Main Control detects an out of range pressure signal. <ul style="list-style-type: none"> <li>• Check pressure hose connection from tub to pressure sensor. Is hose pinched, kinked, plugged, or leaking air?</li> <li>• See TEST #6: Water Level, page 17.</li> </ul>										
<b>F3E2 – INLET WATER TEMPERATURE FAULT</b>	F			2	1	E			2	
Fault is displayed when the Inlet Thermistor is detected to be open or shorted. <ul style="list-style-type: none"> <li>• See TEST #5: Temperature Thermistor, page 16.</li> </ul>										
<b>F5E1 – LID SWITCH FAULT</b>	F		4		1	E				1
Fault is displayed if lid is in locked state, but lid switch is open; control not sensing the strike in the lid lock. <ul style="list-style-type: none"> <li>• User presses START with lid open.</li> <li>• The main control cannot detect the lid switch opening and closing properly.</li> <li>• Strike not assembled correctly on the lid.</li> <li>• Lid lock bezel not installed correctly (must be square to embossing and flush to top).</li> <li>• See TEST #8: Lid Lock, page 18.</li> </ul>										
<b>F5E2 – LID LOCK FAULT</b>	F		4		1	E			2	
Fault is displayed if Lid Lock has not moved into locked position or motor cannot be powered. <ul style="list-style-type: none"> <li>• Lid is not closed completely due to interference.</li> <li>• Check for lock interference with lock striker.</li> <li>• Wash media buildup (detergent, lint, etc.) is preventing the lock mechanism from sliding.</li> <li>• Main control detects open lid switch when attempting to lock.</li> <li>• Main control cannot determine if lid lock is in a locked state.</li> <li>• See TEST #8: Lid Lock, page 18.</li> </ul>										

\* If the Fill or Sensing LED is **ON**, the fault code is represented; if **OFF**, the error code is represented.

## FOR SERVICE TECHNICIAN'S USE ONLY

**FAULT/ERROR CODES #2** — See page 3 to access Fault Code Display Mode. ☐ = ON

FAULT/ERROR CODE – DESCRIPTION	FAULT NUMBER						ERROR NUMBER					
	Status LEDs						Status LEDs					
	FILL*	SENSING	WASH	RINSE	SPIN	DONE	FILL*	SENSING	WASH	RINSE	SPIN	DONE
Explanation & Recommended Procedure (Status LED names may vary between makes and models)												
<b>F5E3 – LID UNLOCK FAULT</b>	F	8	4	2	1		E	8	4	2	1	
Fault is displayed if Lid Lock has not moved into unlocked position or motor cannot be powered. • Check for lock interference with lock striker. • Main control cannot determine if lid lock is in an unlocked state. • See TEST #8: Lid Lock, page 18.												
<b>F5E4 – LID NOT OPENED BETWEEN CYCLES</b>	F		4		1		E		4			
Fault is displayed if the following conditions occur: • User presses START after several consecutive washer cycles without opening lid. • See TEST #8: Lid Lock, page 18.												
<b>F7E1 – BASKET SPEED FAULT</b>	F		4	2	1		E					1
Fault is displayed when the main control cannot determine speed of basket, or speed changes too quickly. • See TEST #3: Drive System, page 13. • VMW calibration—run Calibration Mode, page 4. • Locked rotor—check that basket, impeller, and motor can rotate freely. • Check harness connections from main control to motor and shifter. • See TEST #3a: Drive System—Shifter, page 13. • Control not sensing the basket move in spin—run Tachometer Verification Mode, page 5. • Bad motor capacitor, motor or capacitor connector disconnected, or broken wires to motor or capacitor. • Belt is off or pulley is loose—check drive belt. Verify that belt is fully installed on both pulleys. Also, check that the pulleys are fastened securely to the motor shaft and agitator shaft. • See TEST #3b: Drive System—Motor, page 14. • For more details, see document W10606242.												
<b>F7E5 – SHIFTER FAULT</b>	F		4	2	1		E		4			1
Fault is displayed when the main control cannot determine position of shifter. • See TEST #3: Drive System, page 13. • Check harness connections from main control to motor and shifter. • Observe shifter operation. • See TEST #3a: Drive System—Shifter, page 13.												
<b>F7E6 – MOTOR FAULT</b>	F		4	2	1		E		4	2		
Indicates an open clockwise or counterclockwise circuit of the motor. • See TEST #3: Drive System, page 13. • See TEST #3b: Drive System—Motor, page 14.												
<b>F7E7 – MOTOR UNABLE TO REACH TARGET RPM</b>	F		4	2	1		E		4	2		1
Fault is displayed when basket speed sensor detects that target RPM was not reached. • See TEST #3: Drive System, page 13. • Mechanical friction on drive mechanism or basket (clothing between basket and tub). • Weak motor or run capacitor, or no connection to run capacitor. • Load off balance. Clothing should be distributed evenly when loading. • See TEST #3b: Drive System—Motor, page 14.												
<b>F8E1 – NO FILL, LONG FILL</b>	F	8					E					1
Fault is displayed when the water level does not change for a period of time OR water is present but main control does not detect the water level changing. • Is water supply connected and turned on? • Low water pressure; fill times longer than six minutes. Are hose screens plugged? • Check for proper drain hose installation. Is water siphoning out of the drain hose? • Drain hose must not be more than 4.5" (114 mm) into the drain pipe. • Check pressure hose connection from tub to pressure sensor. Is hose pinched, kinked, plugged, or leaking air? • See TEST #2: Valves, page 13.												
<b>F8E3 – OVERFLOW CONDITION</b>	F	8					E				2	1
Fault is displayed when main control senses water level that exceeds the washer's capacity. • May signify problem with inlet water valves. • Check pressure hose connection from tub to pressure sensor. Is hose pinched, kinked, plugged, or leaking air? • Onboard pressure transducer fault. • Check for proper drain hose installation. Is water siphoning out of the drain hose? Drain hose must not be more than 4.5" (114 mm) into the drain pipe. Make sure drain hose is not seated into drain pipe, and that there is an air gap for ventilation. Ensure drain height is between 39" (991 mm) and 8' (2.4 m) above the floor. • See TEST #2: Valves, page 13 and TEST #6: Water Level, page 17.												
<b>F8E5 – HOT, COLD REVERSED</b>	F	8					E		4			1
Fault is displayed when the hot and cold inlet hoses are reversed. • Make sure inlet hoses are connected correctly. • If hoses are installed properly, temperature thermistor may be stuck in low resistance range. • See TEST #2: Valves, page 13 and TEST #5: Temperature Thermistor, page 16.												
<b>F9E1 – LONG DRAIN</b>	F	8			1		E					1
Fault is displayed when the water level does not change after the drain pump is on for 10 minutes. • Is the drain hose or the drain pump clogged? Check tub sump under impeller for obstructions. • Is the drain hose height greater than 8' (2.4 m)? • Too much detergent. • Check pressure hose connection from tub to pressure sensor. Is hose pinched, kinked, plugged, or leaking air? • Is the pump running? If not, see TEST #7: Drain Pump, page 17.												

\* If the Fill or Sensing LED is **ON**, the fault code is represented; if **OFF**, the error code is represented.

DO NOT REMOVE OR DESTROY

PAGE 7



## FOR SERVICE TECHNICIAN'S USE ONLY

**AUTOMATIC TEST MODE** — See page 4 to access Automatic Test Mode. ☐ = ON

Press the **START** button to begin the Automatic Test.

**IMPORTANT:** Lid must be closed and locked to perform Automatic Test.

FUNCTION	STATUS LEDs					Est. TIME
Recommended Procedure (Status LED names may vary between makes and models)	WASH	RINSE	SPIN	DONE	LID LOCK	In Seconds
LID WILL LOCK				1	On	1
Motor must be at "0" RPM. If lid does not lock, go to Manual Test: Lid Lock, page 9.						
COLD VALVE WILL ACTUATE			2		On	5
If water is not present, or temperature is wrong, go to Manual Test: Cold Valve, page 9.						
HOT VALVE WILL ACTUATE			2	1	On	5
If water is not present, or temperature is wrong, go to Manual Test: Hot Valve, page 9.						
RESERVED FOR FUTURE DEVELOPMENT		4			On	5
Washer will pause for 5 seconds.						
RESERVED FOR FUTURE DEVELOPMENT		4		1	On	5
Hot water valve will actuate for the specified time period.						
RESERVED FOR FUTURE DEVELOPMENT		4	2		On	5
Cold water valve will actuate for the specified time period.						
HOT & COLD VALVE WILL ACTUATE		4	2	1	On	45
Hot & cold water valves will actuate for the specified time period.						
SHIFTER MOVES TO AGITATION POSITION	8				On	~5-15
If motor does not agitate, go to Manual Test: Gentle or Heavy Agitation, page 9.						
MOTOR AGITATES	8			1	On	10
If motor does not agitate, go to Manual Test: Gentle or Heavy Agitation, page 9.						
DRAIN PUMP WILL ACTUATE	8		2		On	~30-40
If water is not draining, go to Manual Test: Drain, page 9.						
SHIFTER MOVES TO SPIN POSITION	8		2	1	On	~5-15
If basket is not turning, go to Manual Test: Low or High Spin, page 9.						
MOTOR SPINS	8	4			On	10
If basket is not turning, go to Manual Test: Low or High Spin, page 9.						
LID REMAINS LOCKED UNTIL WASHER SENSES A STOPPED BASKET	8	4		1	On	~30-45
Basket must stop spinning (0 RPM) before test continues to next phase. Time for basket to stop spinning may vary from 30 seconds up to 2 minutes.						
LID WILL UNLOCK AND CYCLE COMPLETES	8	4	2			1
If lid does not unlock, go to Manual Test: Lid Lock, page 9.						~3 min

## FOR SERVICE TECHNICIAN'S USE ONLY

**MANUAL TEST MODE** — See page 4 to access Manual Test Mode.☐ = ON

Pressing the **START** button will activate/deactivate each output. When the output is activated, the corresponding Status LEDs will flash. **IMPORTANT:** Lid must be closed and locked to perform **SPIN** & **AGITATE** tests.

OUTPUT	STATUS LEDs				
Output Details <b>NOTE:</b> Outputs will time-out after 5 minutes.	WASH	RINSE	SPIN	DONE	LID LOCK
<b>LID LOCK</b> Lock and unlock the lid. <b>NOTES:</b> When lock is enabled, the "Lid Lock" LED will turn ON. Will only lock when lid is closed. Will only unlock when basket RPM is 0. If lid is not closed, washer will flash status LEDs on and off. • If lid does not lock or unlock, go to TEST #8: Lid Lock, page 18.					
<b>COLD VALVE</b> Turns ON and turns OFF cold water valve. • If valve does not turn on, go to TEST #2: Valves, page 13.				1	
<b>HOT VALVE</b> Turns ON and turns OFF hot water valve. • If valve does not turn on, go to TEST #2: Valves, page 13.			2		
<b>RESERVED FOR FUTURE DEVELOPMENT</b> If selected, status LEDs will flash on and off.			2	1	
<b>RESERVED FOR FUTURE DEVELOPMENT</b> If selected, status LEDs will flash on and off.		4			
<b>RESERVED FOR FUTURE DEVELOPMENT</b> If selected, status LEDs will flash on and off.		4		1	
<b>RESERVED FOR FUTURE DEVELOPMENT</b> If selected, status LEDs will flash on and off.		4	2		
<b>DRAIN</b> Turns ON and turns OFF the drain pump. • If pump does not turn on, go to TEST #7: Drain Pump, page 17.		4	2	1	
<b>RESERVED FOR FUTURE DEVELOPMENT</b> If selected, status LEDs will flash on and off.	8				
<b>LOW SPIN – To perform test, lid must be closed and locked.</b> Spins basket from 0 to 500 RPM. <b>NOTE:</b> Allow up to 15 seconds for shifter to reposition. <b>IMPORTANT:</b> To activate Low Spin, RPM must read "0" and lid must be closed with lid lock enabled. If lid is not closed, status LEDs will flash on and off. <b>IMPORTANT:</b> Water in tub must be drained before test. • If motor does not spin, go to TEST #3a & 3b: Drive System (Shifter & Motor), pages 13 & 14.	8			1	On
<b>HIGH SPIN – To perform test, lid must be closed and locked.</b> Spins basket from 0 to maximum RPM. <b>NOTE:</b> Allow up to 15 seconds for shifter to reposition. <b>IMPORTANT:</b> To activate High Spin, RPM must read "0" and lid must be closed with lid lock enabled. If lid is not closed, status LEDs will flash on and off. <b>IMPORTANT:</b> Water in tub must be drained before test. • If motor does not spin, go to TEST #3a & 3b: Drive System (Shifter & Motor), pages 13 & 14.	8		2		On
<b>GENTLE AGITATION – To perform test, lid must be closed and locked.</b> Shifts from idle motor to gentle CW/CCW agitation. <b>NOTE:</b> Allow up to 15 seconds for shifter to reposition. <b>IMPORTANT:</b> To activate Gentle Agitation, RPM must read "0" and lid must be closed with lid lock enabled. If lid is not closed, status LEDs will flash on and off. • If motor does not agitate, go to TEST #3a & 3b: Drive System (Shifter & Motor), pages 13 & 14.	8		2	1	On
<b>HEAVY AGITATION – To perform test, lid must be closed and locked.</b> Shifts from idle motor to heavy CW/CCW agitation. <b>NOTE:</b> Allow up to 15 seconds for shifter to reposition. <b>IMPORTANT:</b> To activate Heavy Agitation, RPM must read "0" and lid must be closed with lid lock enabled. If lid is not closed, status LEDs will flash on and off. • If motor does not agitate, go to TEST #3a & 3b: Drive System (Shifter & Motor), pages 13 & 14.	8	4			On

DO NOT REMOVE OR DESTROY

PAGE 9

## FOR SERVICE TECHNICIAN'S USE ONLY

### TROUBLESHOOTING GUIDE **NOTE:** Always check for error codes first (pgs. 6–7).

Some tests will require accessing components. See Figures 7 & 8, page 19, for component locations. For detailed troubleshooting procedures, refer to "Troubleshooting Tests" beginning on page 12.

PROBLEM	POSSIBLE CAUSE	CHECKS & TESTS
<b>WON'T POWER UP</b> • No operation • No Status LEDs	No power to washer.	Check power at outlet, check circuit breakers, fuses, or junction box connections.
	Connection problem between AC plug and main control.	Check the AC power cord for continuity.
	Main control not properly installed in console.	See TEST #4: Console and Indicators, page 16.
	Main control problem.	See TEST #1: Main Control, page 12.
<b>WON'T START CYCLE</b> No response when Start Button is pressed.	Lid not closed.	Check for interference with lid. Lid must be closed for cycle to start.
	User Interface problem.	See TEST #4: Console and Indicators, page 16.
	Main control problem.	See TEST #1: Main Control, page 12.
<b>UI WON'T ACCEPT SELECTIONS</b>	User Interface problem.	See TEST #4: Console and Indicators, page 16.
	Main control problem.	See TEST #1: Main Control, page 12.
<b>WON'T FILL</b>	No water supplied to washer.	1. Check water connections to washer. 2. Verify hot and cold water supply is on.
	Plugged filter/screen.	Check for plugged filter or screen in the water valve or hoses.
	Drain hose installation.	Check for proper drain hose installation.
	Valve problem.	See TEST #2: Valves, page 13.
	Main control problem.	See TEST #1: Main Control, page 12.
<b>OVERFILLS</b>	Pressure hose.	See TEST #6: Water Level, page 17.
	Valve problem.	See TEST #2: Valves, page 13.
	Washer requires calibration.	Perform washer calibration on page 4.
	Onboard pressure transducer.	See TEST #6: Water Level, page 17.
	Main control problem.	See TEST #1: Main Control, page 12.
<b>WON'T AGITATE</b>	Water covering impeller?	See TEST #6: Water Level, page 17.
	Is lid open during the cycle?	Check for interference with lid. Lid must be closed.
	Drive belt.	Verify that drive belt is not damaged.
	Harness connections.	Check harness connections between main control and drive system.
	Shifter problem.	See TEST #3a: Drive System–Shifter, page 13.
	Motor problem.	See TEST #3b: Drive System–Motor, page 14.
	Tachometer problem.	No tub movement or tub speed out of normal range (obstruction/belt/motor).
	Main control problem.	See TEST #1: Main Control, page 12.
<b>WON'T SPIN</b>	Is lid lock showing open during the cycle?	See TEST #8: Lid Lock, page 18.
	Drive belt.	Verify that drive belt is not damaged.
	Harness connections.	Check harness connections between main control and drive system.
	Shifter problem.	See TEST #3a: Drive System–Shifter, page 13.
	Motor problem.	See TEST #3b: Drive System–Motor, page 14.
	Tachometer problem.	No tub movement or tub speed out of normal range (obstruction/belt/motor).
	Main control problem.	See TEST #1: Main Control, page 12.

## FOR SERVICE TECHNICIAN'S USE ONLY

### TROUBLESHOOTING GUIDE (continued)

Some tests will require accessing components. See Figures 7 & 8, page 19, for component locations. For detailed troubleshooting procedures, refer to "Troubleshooting Tests" beginning on page 12.

PROBLEM	POSSIBLE CAUSE	CHECKS & TESTS
<b>INCORRECT WATER TEMPERATURE</b>	Water hose installation.	Make sure inlet hoses are connected properly.
	Temperature thermistor.	See TEST #5: Temperature Thermistor, page 16.
	Valve problem.	See TEST #2: Valves, page 13.
	Main control problem.	See TEST #1: Main Control, page 12.
<b>WON'T DRAIN</b>	Drain hose installation.	Check for proper drain hose installation. Make sure it is not inserted more than 4.5" (114 mm). Make sure drain hose is not sealed into drain pipe, and that there is an air gap for ventilation.
	Standpipe position.	Ensure drain height is between 39" (991 mm) and 8' (2.4 m) above the floor.
	Plugged drain hose.	Check drain hose for obstructions.
	Obstructions to drain pump.	Check tub sump under agitator plate & basket for obstructions.
	Harness connections.	Check harness connections between main control and drain pump.
	Drain pump.	See TEST #7: Drain Pump, page 17.
	Main control problem.	See TEST #1: Main Control, page 12.
<b>CYCLE TIME LONGER THAN EXPECTED</b>	Oversuds.	1. Verify use of HE detergent. 2. Excessive detergent usage.
	Off balance.	1. Load is off balance. 2. Balance ring water leak.
	Drain hose installation.	Check for proper drain hose installation. Make sure it is not inserted more than 4.5" (114 mm). Make sure drain hose is not sealed into drain pipe, and that there is an air gap for ventilation.
	Standpipe position.	Ensure drain height is between 39" (991 mm) and 8' (2.4 m) above the floor.
	Draining slowly.	Check for pump or drain hose obstructions.
	Water pressure drop.	Results in longer Fill time.
	Friction or drag on drive.	Check motor and bearings; check for clothes between tub and basket.
	Weak suspension.	Basket should not bounce up and down more than once when pushed.
<b>POOR WASH PERFORMANCE</b> Please reference Use & Care Guide	Oversuds.	1. Verify use of HE detergent. 2. Excessive detergent usage.
	Load is tangling.	1. Washer not loaded properly. 2. Perform washer calibration on page 4.
	Incorrect water level.	1. Perform washer calibration on page 4. 2. See TEST #2: Valves, page 13. 3. See TEST #6: Water Level, page 17.
	Clothes wet after cycle is complete (not water saturated, but very damp).	1. Overloaded washer. 2. Oversuds (see above). 3. Items caught in tub sump. 4. Weak suspension. 5. Shifter not moving into position (see TEST #3a). 6. Cold/Rinse water > 105°F. 7. See TEST #7: Drain Pump, page 17.
	Load not rinsed.	1. Check proper water supply. 2. Not using HE detergent. 3. Washer not loaded properly. 4. Shifter not moving into position (see TEST #3a). 5. See TEST #2: Valves, page 13.
	Not cleaning clothes.	1. Washer not loaded properly. 2. Not using HE detergent. 3. Not using correct cycle. 4. Shifter not moving into position (see TEST #3a).
	Fabric damage.	1. Washer overloaded. 2. Bleach added incorrectly. 3. Sharp items in tub.
	Wrong option or cycle selection.	Refer customer to "Use & Care Guide".

DO NOT REMOVE OR DESTROY

PAGE 11

## FOR SERVICE TECHNICIAN'S USE ONLY

### TROUBLESHOOTING TESTS


#### TEST #1: Main Control

This test checks for incoming and outgoing supplies to and from the main control. This test assumes that proper voltage is present at the outlet.

1. Unplug washer or disconnect power.
2. Remove console to access main control.
3. Verify that ALL connectors are inserted all the way into the main control.
4. Plug in washer or reconnect power.
5. With a voltmeter set to **AC**, connect black probe to J5-2 (Neutral) and red probe to J5-1 (L1).

- If 120VAC is present, go to step 6.
- If 120VAC is not present, check the AC power cord for continuity (See Figure 9).
- 6. Is the "Diagnostic LED" ON or OFF? (See Figure 3 below for LED location.)
  - ON: (+5VDC present) continue to step 7.
  - OFF: (+5VDC missing) proceed to step 8.
- 7. With a voltmeter set to **DC**, connect black probe to J12-4 (Circuit Gnd) and red probe to J12-1 (+12VDC).
  - If +12VDC is present, main control supplies are good.
  - If +12VDC is not present, go to step 8.

#### Main Control Board Connectors and Pinouts (Figure 3)

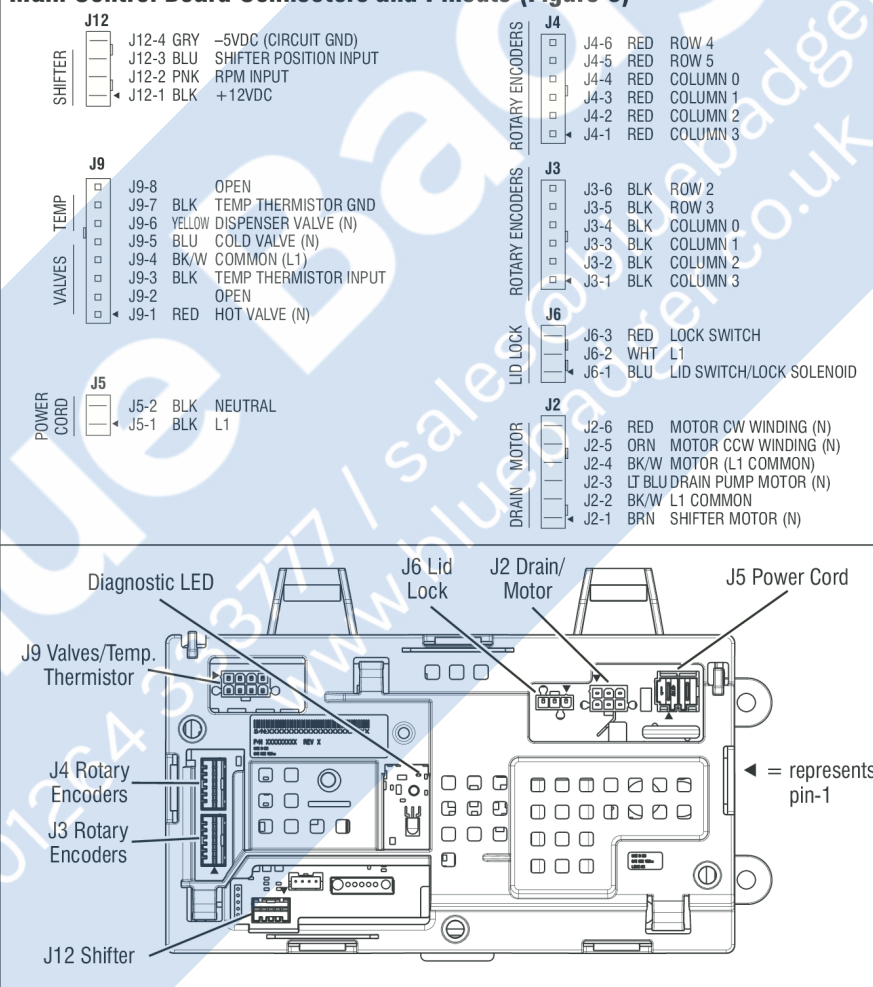



## FOR SERVICE TECHNICIAN'S USE ONLY

8. Check if shifter assembly is affecting the main control DC supplies.
  - a. Unplug washer or disconnect power.
  - b. Remove connector **J12** from main control.
  - c. Plug in washer or reconnect power.
  - d. Repeat steps 6 and 7. Perform the +12VDC check inside header J12 on the board – **do not short pins together.**
    - If one or more DC voltages are still missing, go to step 9.
    - If the DC voltages return, check for short in harness between main control and shifter assy.
    - If harness and connections are good, replace shifter assembly.
9. Main Control has malfunctioned.
  - a. Unplug washer or disconnect power.
  - b. Replace the main control.
  - c. Reassemble all parts and panels.
  - d. Plug in washer or reconnect power. Calibrate washer and perform Automatic Test to verify repair.

### TEST #2: Valves

This test checks the electrical connections to the valves, and the valves themselves.

1. Check the relays and electrical connections to the valves by performing the Cold and Hot Valve tests under Manual Test Mode on page 9. Each test activates and deactivates the selected valve. The following steps assume one (or more) valve(s) did not turn on.
2. For the valve(s) in question check the individual solenoid valves:
  - a. Unplug washer or disconnect power.
  - b. Remove console to access main control.
  - c. Remove connector **J9** from main control. Refer to main control diagram on page 12.
  - d. Check harness connection to solenoid valves.
3. Check resistance of the valve coils across the following J9 connector pinouts:

Valve	Pinout
Hot Valve	J9, 1 & 4
Cold Valve	J9, 5 & 4

Resistance should be 890–1.3k Ω.

- If resistance readings are tens of ohms outside of range, replace the valve assembly.
- If resistance readings are within range, replace main control and calibrate washer. Perform Automatic Test to verify repair.

### TEST #3: Drive System

1. Activate Service Diagnostic Test Mode, retrieve any fault/error codes, and clear them. If the displayed error codes are F7-E1, F7-E5, or motor speed codes, there is likely a motor, capacitor, or shifter related issue.
2. Once the error codes are cleared, enter Manual Test Mode and run the Heavy Agitation test; if the motor runs after 15–20 seconds, there is not a problem with the motor, capacitor,

control, or wiring harness connections (although the black wire from the shifter to the control should still be checked).

**NOTE:** The speed wheel in the transmission only turns during the spin cycle.

3. While in Manual Test Mode, try to get the washer to spin; if the motor hums briefly and then shuts down (with the lid lock indicator blinking), go to Fault Code Display Mode and look for shifter or basket speed errors, which verify an issue with the shifter/sensor assembly (optical sensor is not reading the motor speed).

### TEST #3a: Drive System – Shifter

This test checks connections, shifter motor, switch, and optical sensor.

**NOTE:** Refer to Figure 4, “Shifter Assembly Strip Circuit” on page 14 for tests and measurements.

**IMPORTANT:** Drain water from tub before accessing bottom of washer.

#### Functional Check:

1. Check the shifter and electrical connections by performing both the Spin AND Agitate test under Manual Test Mode on page 9. The following steps assume that this step was unsuccessful.
2. Unplug washer or disconnect power.
3. Check to see if basket will turn freely.
  - If basket turns freely, go to step 4.
  - If basket does not turn freely, determine what is causing the mechanical friction or lockup.
4. Remove console to access main control.
5. Visually check that the J12 and J2 connectors are inserted all the way into the main control.
  - If visual checks pass, go to step 6.
  - If connectors are not inserted properly, reconnect J12 and J2 and repeat step 1.

#### Shifter Motor:

**NOTE:** Before starting the electrical check, verify that the cam on the splutch is moving freely and not binding.

6. Remove connector **J2** from main control. With an ohmmeter, verify resistance of the shifter motor across the following J2 connector pinouts:

Component	J2 Connector Pinout
Shifter Motor	J2, 1 & 2

Resistance should be 2k to 3.5k Ω.

- If values are correct, reconnect J2 and proceed to step 7.
- If values are open or out of range, go to step 13.

7. Plug in washer or reconnect power.

8. With a voltmeter set to **AC**, connect the black probe to J2-2 (L1) and red probe to J2-1 (N). Activate shifter motor by switching between Spin and Agitate modes. Energize outputs using Manual Test Mode on page 9.

**IMPORTANT:** Lid must be closed with Lid Lock enabled to run the SPIN and AGITATE tests.



## FOR SERVICE TECHNICIAN'S USE ONLY

**NOTE:** It will take 4–15 seconds for the shifter to change states.

- If 120VAC is present, go to step 9.
- If 120VAC is not present, go to step 17.

**Shifter Switch:**

9. With a voltmeter set to **DC**, connect the black probe to J12-4 (Circuit Gnd) and red probe to J12-3 (Shifter Switch). In manual test mode, switch between Spin and Agitate modes. Voltage should toggle between 0 and +5VDC.

SPIN = +5 VDC

AGITATE = 0 VDC

- If voltage corresponds to setting, go to step 10.
- If voltage does not switch, go to step 12.

**Optical Sensor:**

10. With a voltmeter set to **DC**, connect the black probe to J12-4 (Circuit Gnd) and red probe to J12-1 (+12VDC).

- If +12VDC is present, go to step 11.
- If +12VDC is not present, go to step 17.

11. Activate Tachometer Verification Mode from the Service Diagnostic Test Modes (see page 5). Slowly turn the basket by hand. The 4 status LEDs should illuminate one at a time to represent basket RPM.

- If the tachometer is not verified, go to step 12.
- If the tachometer is verified, go to step 17.

12. Unplug washer or disconnect power.

13. Tilt washer back to access the bottom of the washer and the drive motor area.

14. Visually check the electrical connections to the shifter.

- If visual check passes, go to step 15.
- If connections are loose, reconnect the electrical connections and repeat step 1.

15. With an ohmmeter, check the harness for continuity between the shifter and main control using the pinouts in the following chart.

- If there is continuity, go to step 16.
- If there is no continuity, replace the lower washer harness and repeat step 1.

**Shifter to Main Control & Drain Pump**

Shifter Connector Pin 1 to Main Control J12-2

Shifter Connector Pin 2 to Main Control J12-1

Shifter Connector Pin 3 to Main Control J2-2

Shifter Connector Pin 4 to Main Control J12-3

Shifter Connector Pin 5 to Main Control J12-4

Shifter Connector Pin 6 to Main Control J2-1

16. Replace the shifter assembly.

a. Unplug washer or disconnect power.

b. Replace shifter assembly.

c. Reassemble all parts and panels.

d. Plug in washer or reconnect power. Calibrate washer and perform Automatic Test to verify repair.

17. If the preceding steps did not correct the problem, replace the main control.

a. Unplug washer or disconnect power.

b. Replace the main control.

c. Reassemble all parts and panels.

d. Plug in washer or reconnect power. Calibrate washer and perform Automatic Test to verify repair.

**TEST #3b: Drive System – Motor**

This test checks the motor, motor windings, wiring, and start capacitor.

**NOTE:** Refer to Figure 5, "PSC Motor Strip Circuit" on page 15 for tests and measurements.

**IMPORTANT:** Drain water from tub before accessing bottom of washer.

1. Check the motor and electrical connections by performing the Gentle or Heavy Agitation test under Manual Test Mode on page 9. Verify that the basket is spinning in a clockwise direction while performing Low or High Spin test under Manual Test Mode on page 9. The following steps assume that this step was unsuccessful.

2. Unplug washer or disconnect power.

3. Check to see if basket will turn freely.

- If basket turns freely, go to step 4.

- If basket does not turn freely, determine what is causing the mechanical friction or lockup.

4. Remove console to access main control.

5. Visually check that the J12 and J2 connectors are inserted all the way into the main control.

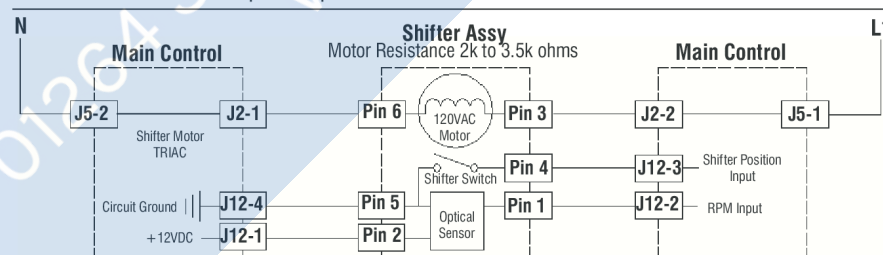


Figure 4 - Shifter Assembly Strip Circuit (Shifter Switch: Open = SPIN, Closed = AGITATE)

## FOR SERVICE TECHNICIAN'S USE ONLY

- If visual checks pass, go to step 6.
- If connectors are not inserted properly, reconnect J12 and J2 and repeat step 1.

**6.** Plug in washer or reconnect power. Run the Gentle Agitation test under Manual Test Mode on page 9.

**7.** With a voltmeter set to **AC**, connect black probe to J2-4 (L1) and red probe to J2-6 (CW Winding).

- If 120VAC is cycling ON during CW rotation, go to step 8.
- If 120VAC is not present, go to Test #1: Main Control, page 12.

**8.** With a voltmeter set to **AC**, connect black probe to J2-4 (L1), red probe to J2-5 (CCW Winding).

- If 120VAC is cycling ON during CCW rotation, go to step 9.
- If 120VAC is not present, go to Test #1: Main Control, page 12.

**9.** Unplug washer or disconnect power.

**10.** Remove connector **J2** from main control. With an ohmmeter, check resistance of motor windings across the following J2 connector pinouts:

**NOTE:** If the console has a cycle selector knob and 4 rotary switches, the motor size is 1/3 HP.

Size	Motor Winding	J2 Pinout	Resistance
1/4 HP	CW Winding	J2, 4 & 6	5 to 9.5 Ω
	CCW Winding	J2, 4 & 5	5 to 9.5 Ω
1/3 HP	CW Winding	J2, 4 & 6	3.5 to 6 Ω
	CCW Winding	J2, 4 & 5	3.5 to 6 Ω

- If values are open or out of range, go to step 11.
- If values are correct, go to step 15.

**11.** Tilt washer back to access drive system.

**12.** Visually check the mounting bracket and electrical connections to the motor and shifter. Verify that the wires between the motor and the harness are connected this way: Black-white/White, Orange/Yellow, and Red/Red.

- If visual check passes, go to step 13.
- If connections are loose, reconnect the electrical connections, reassemble motor cover, and repeat step 1.

**13.** With an ohmmeter, check the harness for continuity between the main control, motor, and run capacitor using the following test points.

Motor Harness Check	
Motor Connector Pin-1 to Chassis Ground	
Motor Connector Pin-3 to Main Control J2-5	
Motor Connector Pin-3 to Run Capacitor Pin-3	
Motor Connector Pin-4 to Main Control J2-6	
Motor Connector Pin-4 to Run Capacitor Pin-1	
Motor Connector Pin-2 to Main Control J2-4	

- If there is continuity, go to step 14.
- If there is no continuity, replace the lower machine harness and repeat step 1.

**14.** With an ohmmeter, check resistance of motor windings at the following motor connections.

**NOTE:** If the console has a cycle selector knob and 4 rotary switches, the motor size is 1/3 HP.

Size	Motor Winding	Motor Pinout	Resistance
1/4 HP	CW Winding	Pins 4 & 2	5 to 9.5 Ω
	CCW Winding	Pins 3 & 2	5 to 9.5 Ω
1/3 HP	CW Winding	Pins 4 & 2	3.5 to 6 Ω
	CCW Winding	Pins 3 & 2	3.5 to 6 Ω

- If values are open or out of range, replace motor.

- If values are correct, go to step 15.

**15.** Test Motor Run Capacitor. **NOTE:** A faulty capacitor may cause the motor to "hum", not start, or turn slowly.

- Discharge the capacitor by touching the leads of a 20,000 Ω resistor to the two terminals.
  - Disconnect the wires from the capacitor terminals.
  - With an ohmmeter, measure across the terminals and note reading.
- If a steady increase in resistance is noted, continue to step 16.

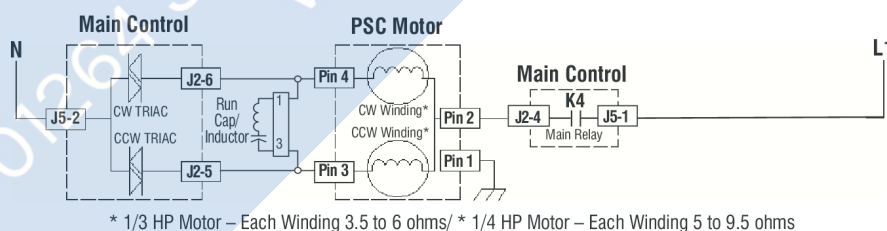


Figure 5 - PSC Motor Strip Circuit (shown in ON position)

## FOR SERVICE TECHNICIAN'S USE ONLY

- If the capacitor is either shorted or open, replace capacitor, calibrate, and repeat step 1.
- 16.** If the preceding steps did not correct the motor problem, replace the main control.
  - a. Unplug washer or disconnect power.
  - b. Replace the main control.
  - c. Reassemble all parts and panels.
  - d. Plug in washer or reconnect power. Calibrate washer and perform Automatic Test to verify repair.

### TEST #4: Console and Indicators

#### Console and Indicators Check:

This test is performed when any of the following situations occurs during "UI Test Mode" on page 4.

- ✓ None of the LEDs light up
- ✓ One or more Status LEDs are flashing
- ✓ Turning rotary switch does not toggle LED

#### None of the LEDs light up:

1. Unplug washer or disconnect power.
2. Access the main control and visually check that ALL connectors are inserted all the way into their respective headers.
3. Visually check that the main control assembly is properly inserted in the console.
4. If both visual checks pass, follow procedure under TEST #1, "Main Control" on page 12 to verify supply voltages.
5. To verify repair, activate the Service Diagnostic Mode, and then perform UI Test Mode on page 4.

#### One or more Status LEDs are flashing:

If one or more of the status LEDs are flashing (on and off in 0.5 second intervals), refer to the following notes to identify the switch(es) in question. Reference the wiring diagram on page 20 when performing the following procedures.

- a. Verify the switch connector is inserted all the way into the main control.
- b. Check the harness between the switch and main control for continuity. Check for shorts.
- c. Replace the switch.

**NOTE 1:** The number and location of rotary switches varies between makes and models.

**NOTE 2:** Regardless of location, switches are read from left to right, the left-most switch being #1.

**NOTE 3:** Each rotary switch and the cycle selector knob is represented by the following status LEDs:

- Rotary Switch #1 - toggles (1) Fill LED
- Rotary Switch #2 - toggles (2) Wash LED
- Rotary Switch #3 - toggles (3) Rinse LED
- Rotary Switch #4 - toggles (4) Spin LED
- Cycle Select Knob - toggles (5) Done LED

**NOTE 4:** Status LED names may vary between makes and models. Use LED # identification.



#### Turning rotary switch does not toggle LED:

Perform the procedures under "One or more Status LEDs are flashing."

### TEST #5: Temperature Thermistor

This test checks valves, main control, temperature thermistor, and wiring.

1. Check the cold valve by performing Cold Valve test under Manual Test Mode on page 9.
  - If cold water is being dispensed, proceed to step 2.
  - If hot water is being dispensed, verify proper hose connection.
2. Check the hot valve by performing Hot Valve test under Manual Test Mode on page 9.
  - If hot water is being dispensed, proceed to step 3.
  - If cold water is being dispensed, ensure that household hot water is present.
3. Unplug washer or disconnect power.
4. Remove console to access main control.
5. Remove connector **J9** from the main control. With an ohmmeter, measure the resistance of the temperature thermistor between pins J9-3 and J9-7. Verify that the approximate resistance, shown in the following table, is within ambient temperature range.

## FOR SERVICE TECHNICIAN'S USE ONLY

THERMISTOR RESISTANCE		
Approx. Temperature		Approx. Resistance
F°	C°	(KΩ)
32	0	163
41	5	127
50	10	100
59	15	79
68	20	62
77	25	50
86	30	40
95	35	33
104	40	27
113	45	22
122	50	18
131	55	15
140	60	12
149	65	10

- If the resistance is within the range shown in the table, go to step 6.
- If the resistance is infinite or close to zero, replace the temperature thermistor assembly.

**NOTE:** Most thermistor errors are a result of the resistor being out of range. If the temperature thermistor malfunctions, the washer will default to pre-programmed wash settings.

6. If the thermistor is good, replace main control and calibrate washer. Perform Automatic Test to verify repair.

### TEST #6: Water Level

This test checks the water level sensing components. The washer has an on-board pressure transducer. **NOTE:** Usually, if the pressure transducer malfunctions, the washer will generate a long fill, or long drain error.

1. Check the functionality of the pressure transducer by running a small load cycle. The valves should turn off automatically after sensing the correct water level in the tub. The following steps assume that this step was unsuccessful.
2. Drain the tub until all water has been removed.
3. Unplug washer or disconnect power.
4. Remove console to access controls.
5. Check hose connection between the pressure transducer and the pressure dome attached to the tub.
6. Check to ensure hose is routed correctly in the lower cabinet and not pinched or crimped by the back panel.
7. Verify there is no water, suds, or debris in the hose or dome. Disconnect hose from main control and blow into hose to clear water, suds, or debris.
8. Check hose for leaks. Replace if needed.
9. Replace the main control and calibrate washer. Perform Automatic Test to verify repair.

### TEST #7: Drain Pump

Perform the following checks if washer does not drain.

**NOTE:** Refer to Figure 6, "Drain Pump Strip Circuit" for tests and measurements.

**IMPORTANT:** Drain water from tub before accessing bottom of washer.

1. Check for obstructions in the usual areas. Clean and then perform step 2.

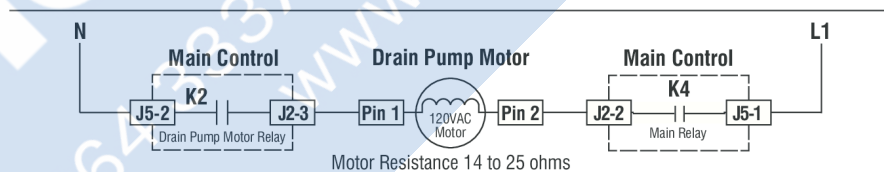


Figure 6 - Drain Pump Strip Circuit



## FOR SERVICE TECHNICIAN'S USE ONLY

2. Check the drain pump and electrical connections by performing the Drain Test under Manual Test Mode on page 9. The following steps assume that this step was unsuccessful.

3. Unplug washer or disconnect power.
4. Remove console to access main control.
5. Visually check that the J2 connector is inserted all the way into the main control.

- If visual check passes, go to step 6.
- If connector is not inserted properly, reconnect J2 and repeat step 2.

6. Remove connector **J2** from main control. With an ohmmeter, verify resistance values shown below across the following J2 connector pinouts:

Component	J2 Connector Pinout
Drain Pump	J2, 2 & 3

Resistance should be 14–25 Ω.

- If values are open or out of range, go to step 7.
- If values are correct, go to step 11.

7. Tilt washer back to access drain pump. Verify pump is free from obstructions.

8. Visually check the electrical connections at the drain pump.

- If visual check passes, go to step 9.
- If connections are loose, reconnect the electrical connections and repeat step 2.

9. With an ohmmeter, check harness for continuity between the drain pump and main control. See chart below.

Main Control to Drain Pump
Drain Pump Pin-1 to Main Control J2-3
Drain Pump Pin-2 to Main Control J2-2

- If there is continuity, go to step 10.
- If there is no continuity, replace the lower machine harness and repeat step 2.

10. With an ohmmeter, measure the resistance across the two pump terminals. Resistance should be 14–25 Ω.

- If values are open or out of range, replace the pump motor.
- If the resistance at the pump motor is correct, go to step 11.

11. If there is a stuck pump, check for a blown board. If the board has a blown R69 surge resistor, check for stuck or shorted pump motor; if OK, check all other loads with input to the board.

12. If the preceding steps did not correct the drain problem, replace the main control.

- a. Unplug washer or disconnect power.
- b. Replace the main control.
- c. Reassemble all parts and panels.
- d. Plug in washer or reconnect power. Calibrate washer and perform Automatic Test to verify repair.

### TEST #8: Lid Lock

Perform the following checks if the washer does not lock (or unlock).

1. Perform the Lid Lock test under Manual Test Mode on page 9. The following steps assume that this step was unsuccessful.

2. Check lid lock mechanism for obstruction or binding. Repair as necessary.

3. Unplug washer or disconnect power.
4. Remove console to access main control.
5. Visually check that the J6 connector is inserted all the way into the main control.
- If visual check passes, go to step 6.
- If connector is not inserted properly, reconnect J6 and repeat step 1.

6. Remove connector **J6** from main control. With an ohmmeter, verify lid lock resistance values shown below across the following J6 connector pinouts:

LID LOCK RESISTANCE			
Component	Resistance	Contacts Measured	
Lock Switch Solenoid	Lid Closed = 85 to 155 ohms	J6-2	J6-1
Lock Switch	Locked = 0 ohms Unlocked = Open Circuit	J6-3	J6-2
Lid Switch	Lid Open = Open Circuit	J6-2	J6-1


- If resistance values are good, go to step 7.
- If switch measurements do not match the values shown in the table for unlocked (or locked) condition, a problem exists in the lid lock. Replace the lid lock mechanism.

7. If the preceding steps did not correct the lock problem, replace the main control.


- a. Unplug washer or disconnect power.
- b. Replace the main control.
- c. Reassemble all parts and panels.
- d. Plug in washer or reconnect power. Calibrate washer and perform Automatic Test to verify repair.

## FOR SERVICE TECHNICIAN'S USE ONLY

### Component Locations – Console & Valves (Figure 7)

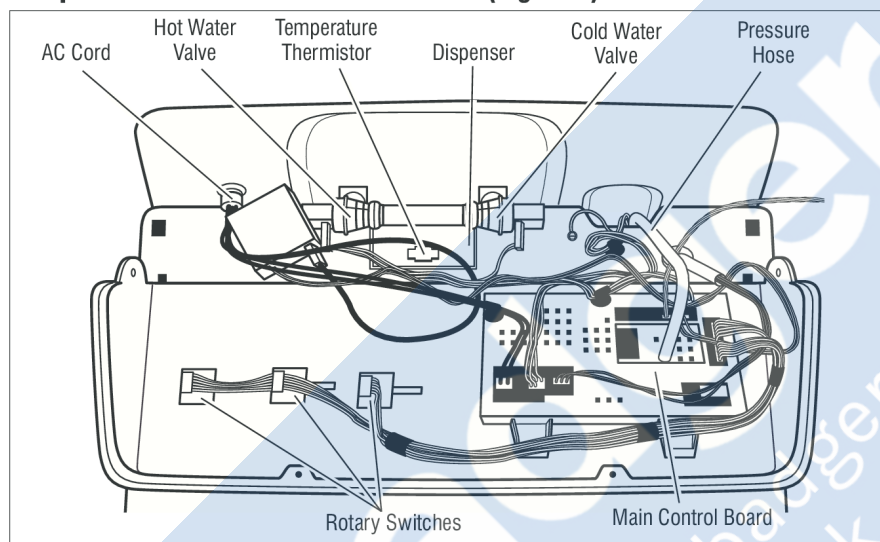

### Component Locations – Drive System & Drain Pump (Figure 8)

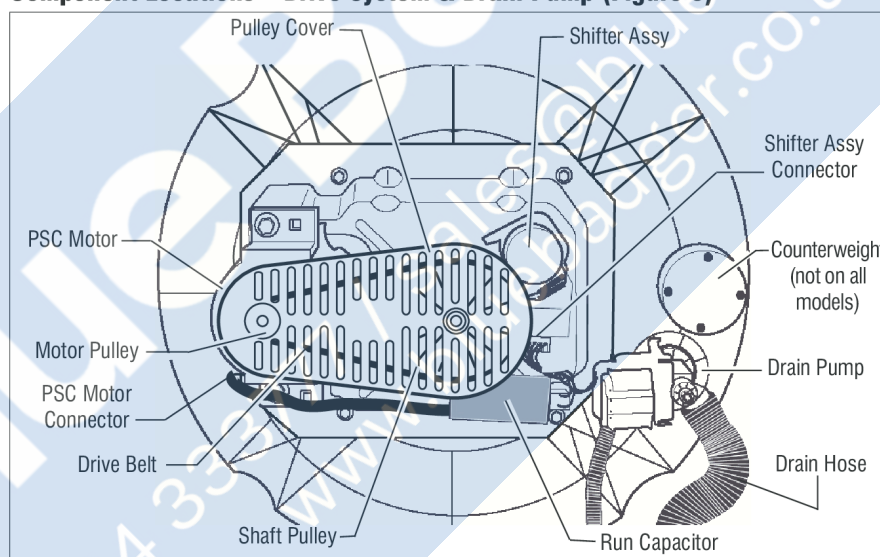

### Specifications

WASHER SPECIFICATIONS	
Voltage:	100-135 VAC
Frequency:	57-63 Hz
Max. Amps:	12 Amps
Circuit Protection:	15 Amp Instantaneous Type Fuse (Main Control)
Water Pressure:	15-125 PSI
Drain Height:	34 in. to 8 ft. (86 cm to 244 cm)
Operating Temperature Range:	40 - 115° F (4.5 - 46° C)

DO NOT REMOVE OR DESTROY

PAGE 19



## FOR SERVICE TECHNICIAN'S USE ONLY

**Wiring Diagram** (1/3 or 1/4 HP motor, onboard pressure transducer, 3 or 4 rotary switches)

**IMPORTANT:** Electrostatic discharge may cause damage to machine control electronics. See page 1 for ESD information.

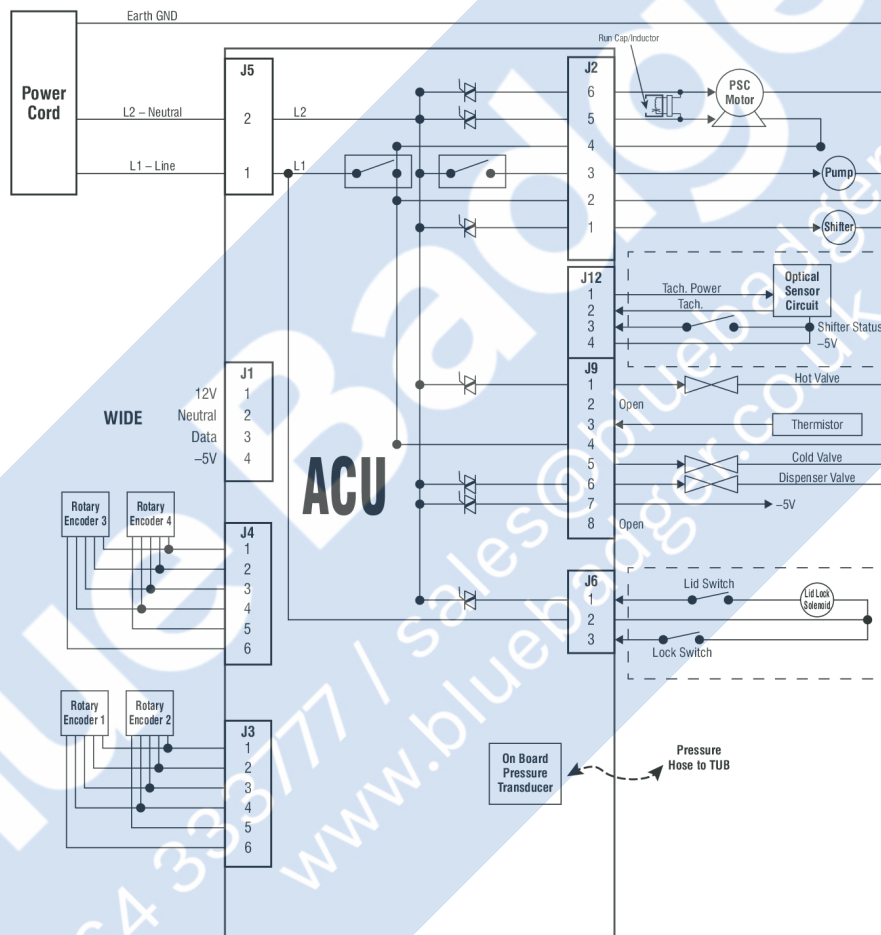


Figure 9 - Wiring Diagram